

# DH-PFM340-5CH

## CCTV Distributed Power Supply



### Features

- 5 Channel security camera power supply distribution box with individual LED output indicator and metal case by lock key to prevent unauthorized access.
- Wide voltage input: AC90~264Vac, meet the requirements in different parts for electric network fluctuation.
- High quality and reliability: pass 100% quality examination and 3 months high temperature aging test.
- With overload protection, over-current protection, over-voltage protection, anti-static and anti-interference ability.
- Professional wall-mounted installation with reserved outlet holes, convenient and flexible.


## Technical Specifications

|                                 |                                                  |
|---------------------------------|--------------------------------------------------|
| <b>Model</b>                    | <b>DH-PFM340-5CH</b>                             |
| <b>General</b>                  |                                                  |
| Input voltage range             | AC90~264V                                        |
| Outputs                         | 5 x 12VDC (-3%~+7%) Outputs                      |
| Max. output                     | 4 A                                              |
| Output protection               | 5 replacement fuses, max. per output 2.5A        |
| Efficiency                      | 84%                                              |
| No load power consumption       | <0.5W                                            |
| Surge protected                 | Line to ground: 4000V<br>Line to line: 2000V     |
| ESD                             | Contact discharge: 6000V<br>Air discharge: 8000V |
| Internal ON/OFF power switch    | Yes                                              |
| Individual LED output indicator | Yes                                              |
| Dimension                       | 165mmx165mmx50mm(6.5"x6.5"x1.97")                |
| Weight                          | 0.85kg(1.87lb)                                   |
| Color                           | White                                            |
| Installation mode               | Wall-mounted                                     |
| Operating temperature           | -20°C ~ +45°C (-4°F ~ +113°F)                    |
| Operating humidity              | <90% RH                                          |
| Certification                   | CE/FCC                                           |

## Order Information

| Type  | Part Number   | Description                                                   |
|-------|---------------|---------------------------------------------------------------|
| Power | DH-PFM340-5CH | CCTV distributed power supply<br>_Dahua brand, 5x0.8A, DC12V  |
|       | DH-PFM341-9CH | CCTV distributed power supply<br>_Dahua brand, 9x0.55A, DC12V |

## Dimensions (mm/inch)

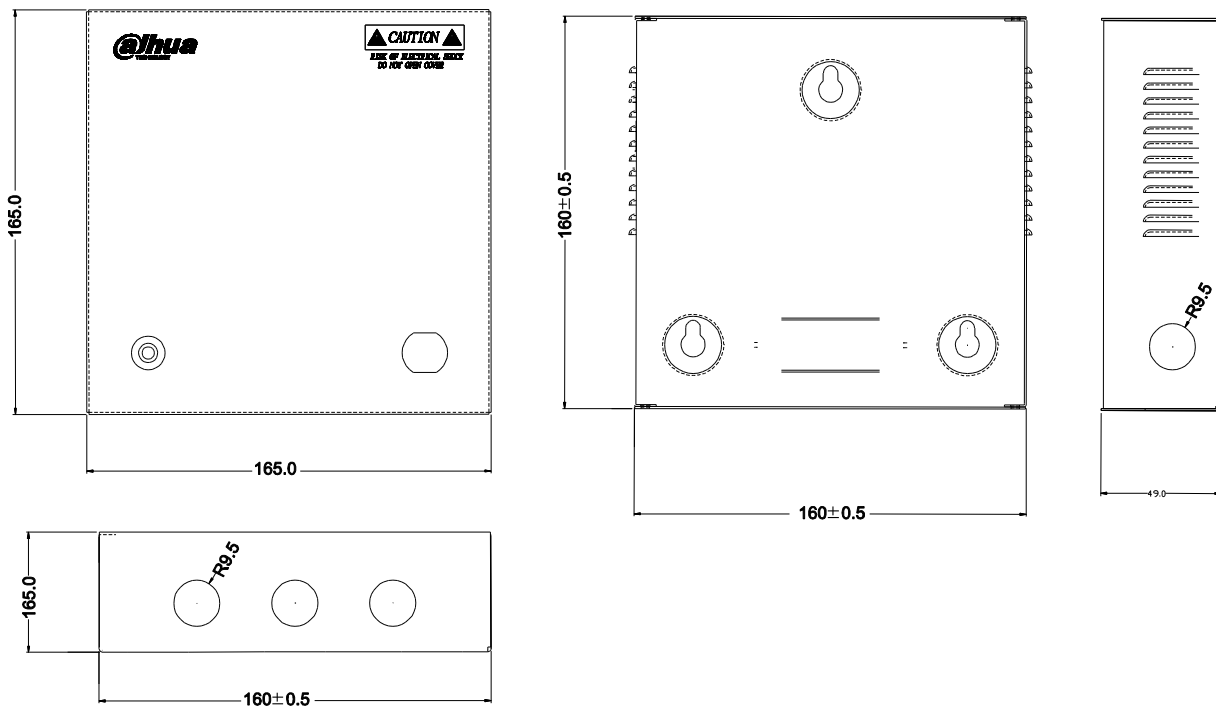

## Package Information

- CCTV distributed power supply box DH-PFM340-5CH \*1
- Mounting sticker \*1
- Fuse \*2
- Key \*2
- St4 screw \*3
- Plastic anchor \*3

| Package data             |                                         |
|--------------------------|-----------------------------------------|
| Box Dimension            | 178mmx178mmx63mm (7.01"x7.01"x2.48")    |
| Box Weight               | 0.95kg (2.09lb)                         |
| Protective Box Dimension | 620mmx392mmx205mm (24.41"x15.43"x8.07") |
| Box In Protective Box    | 14 In 1                                 |