


GARDIAN Beam Towers

Series 4598 - Semi-cylindrical double-sided (360°) towers

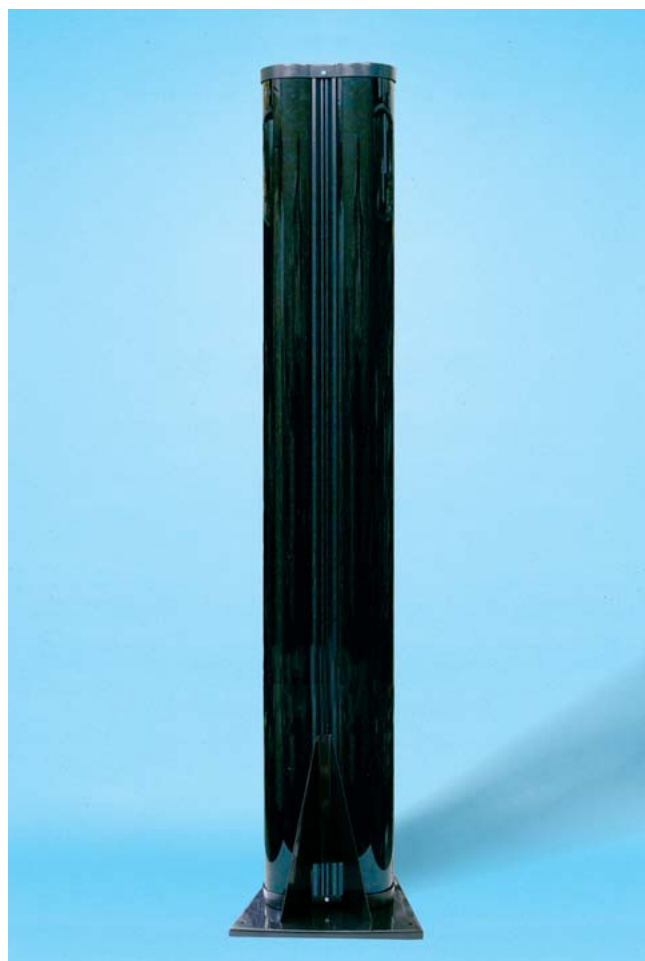

DESCRIPTION


These double-sided models allow the installation of infrared beams at the same height aiming at different angles, for a total coverage of 360°.

These models are very popular for long perimeter protections of high security sites.

FEATURES

- Total concealment of the aiming, height and number of photobeams installed inside
- Sturdy aluminium extrusion and die-casting covers
- Possibility of aiming photobeams through 360° horizontally
- Available in standard heights of 1.00 m, 1.50 m, 2.00 m, 2.50 m and 3.00 m
- Excellent resistance to atmospheric agents and condensation

DIMENSIONS (mm)

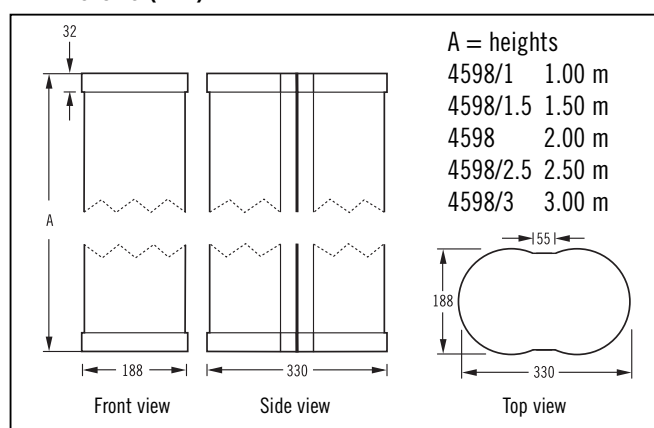

CODE	MODEL	DESCRIPTION
HE45981	4598/1	Semi-cylindrical double-sided (360°) beam tower, height 1.00 m
HE45985	4598/1.5	Semi-cylindrical double-sided (360°) beam tower, height 1.50 m
HE4598	4598	Semi-cylindrical double-sided (360°) beam tower, height 2.00 m
HE45987	4598/2.5	Semi-cylindrical double-sided (360°) beam tower, height 2.50 m
HE45983	4598/3	Semi-cylindrical double-sided (360°) beam tower, height 3.00 m

Accessories*

HZF4598	BC-4598	Steel base for double-sided 4598 towers, WxHxD mm 400x420x400, complete with rails and screws
HZS4598	SC-4598	Wall mounting plate for Series 4598 double-sided towers
HE44AOX	AP-0X/4498	Mounting plate for Optex AX-70TN/130TN/200TN, AX-100TF/200TF and BX-100PLUS
HEAXMK2	AX-MK2P	Mounting plate for Optex AX-250/500PLUS and AX-350/650TF
HEAXMK3	AX-MK3P	Mounting plate for Optex AX-350/650DH MKIII infrared barriers
HE4498A	4498A	Tamper kit
HE4598AC	4598AC	Anticlimb tamper pressure switch top kit for double-sided towers
HE4498T	4498T	Heating control kit
HE4498H	4498H	Heater controlled by 4498T
HE44/18	4418	Transformer 230/18VAC for heater 4498H

* Other beam manufacturers mounting plates available upon request

