

VIDEO INTERCOM

Products and Solutions

2017 Ver. 1

CONTENTS

● PRODUCTS 02 - 16

- IP Apartment Outdoor Station
- IP Moduler Outdoor Station
- IP Villa Outdoor Station
- IP Indoor Monitor
- IP 2-Wire System
- Wi-Fi System
- Analog Apartment Outdoor Station
- Analog Villa Outdoor Station
- Analog Indoor Monitor
- KIT
- Accessories
- Software & Management Device
- Emergency Phone Terminal

● SOLUTIONS 17 - 26

- IP Apartment Solution
- IP Small Apartment Solution
- IP 2-Wire Apartment Solution
- Analog Apartment Solution
- IP Villa Solution
- IP 2-Wire Villa Solution
- Wi-Fi Villa Solution
- Analog Villa Solution
- Emergency Phone Terminal Solution

PRODUCTS



IP Apartment Outdoor Station

- 1.3MP CMOS camera
- LCD screen
- Night vision
- Echo cancellation
- Voice indication
- Video & Audio messaging



IP Apartment Outdoor Station

	Apartment Outdoor Station				
	VTO1210C-X	VTO1210B-X	VTO1210A-X	VTO1220BW	VTO1220A
Model					
Image Sensor	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS
Lens	3.6mm	3.6mm	3.6mm	3.6mm	3.6mm
Angle of View	D:95° H:75°	D:95° H:75°	D:95° H:75°	D:95° H:75°	D:95° H:75°
Day/Night	Color Image	Color Image	Color Image	Color Image	Color Image
LCD Screen	3" STN 128×64	3" STN 128×64	3" STN 128×64	3.5" TFT 320×240	3.5" TFT 320×240
Reader	Mifare Card	Mifare Card	Mifare Card	Mifare Card	Mifare Card
Body Approaching	1m	1m	—	1m	1m
Keypad	Mechanical Button	Touchpad	Mechanical Button	Touchpad	Mechanical Button
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
Ingress Protection	IP54	IP65	IP54	IP65	IP54
Tamper Switch	1	1	1	1	1
Ethernet	10M/100Mbps	10M/100Mbps	10M/100Mbps	10M/100Mbps	10M/100Mbps
Installation	Surface & Flush	Flush	Flush	Flush	Flush
Material	Stainless Steel	Tempered Glass	Aluminum	Tempered Glass	Aluminum
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	DC12V, Max 10W	DC12V, Max 10W	DC12V, Max 10W	DC12V, Max 10W	DC12V, Max 10W

VIDEO INTERCOM

— 4 —

IP Modular Outdoor Station

- 1.3MP CMOS camera
- Large field of view angle
- Night vision
- Voice indication
- Echo cancellation
- Modular design (Max 9 modules,VTO2000A-C needed)



● Camera Module(needed)

● Button Module(max 8)

● Card Module

3-module Frame(2-module or 9-module Frames are available)

Optional



Keyboard Module




Fingerprint Module

IP Modular Outdoor Station

	Modular Outdoor Station				
	VTO2000A-C	VTO2000A-B	VTO2000A-R	VTO2000A-K	VTO2000A-F
Model					
Image Sensor	1/3" 1.3MP CMOS	—	—	—	—
Lens	2.8mm	—	—	—	—
Angle of View	D:120° H:90°	—	—	—	—
Day/Night	Color Image	—	—	—	—
Reader	—	—	Mifare Card	—	Fingerprint
Body Approaching	—	—	1m	—	—
Keypad	Mechanical Button	Mechanical Button	—	Mechanical Button	—
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	—	—	—	—
Ingress Protection	IP54, IK07	IP54, IK07	IP54, IK07	IP54, IK07	IP54, IK07
Tamper Switch	1	—	—	—	—
Ethernet	10M/100Mbps	—	—	—	—
Installation	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	DC12V/24V, Max 10W				

IP Villa Outdoor Station

- Megapixel CMOS camera
- Night vision
- Voice indication
- Group call
- Video & Audio messaging
- Remote intercom with mobile APP

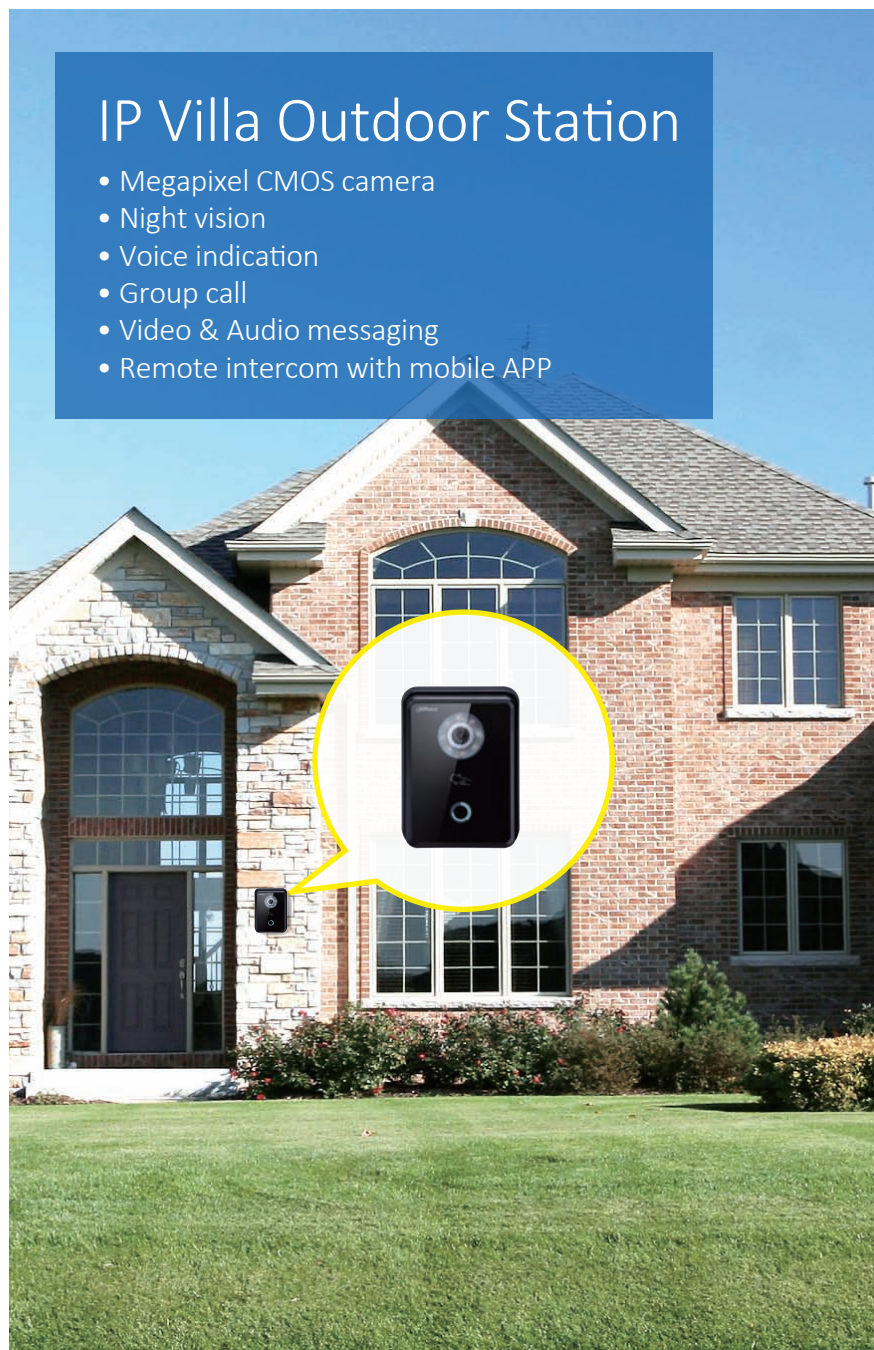

IP Villa Outdoor Station

	Villa Outdoor Station			
	VTO2000A	VTO6100C	VTO6210B	VTO6210BW
Model				
Image Sensor	1/4" 1MP CMOS	1/3" 1.3MP CMOS	1/4" 1 MP CMOS	1/4" 1 MP CMOS
Lens	2.8mm	3.6mm	3.6mm	3.6mm
Angle of View	D:85° H:75°	D:95° H:75°	D:70° H:60°	D:70° H:60°
Day/Night	Color Image	Color Image	Color Image	Color Image
Reader	—	Mifare Card	Mifare Card	Mifare Card
Keypad	Mechanical Button	Mechanical Button	Touch Button	Touch Button
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
Ingress Protection	IP54, IK07	IP54	IP65	IP65
Tamper Switch	1	1	1	1
Ethernet	10M/100Mbps	10M/100Mbps	10M/100Mbps	10M/100Mbps
Installation	Surface & Flush	Flush	Surface	Surface
Material	Stainless Steel	Plastic	Tempered Glass	Tempered Glass
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	DC12V/24V, Max 10W	DC12V, Max 10W	DC12V, Max 10W	DC12V, Max 10W

IP Indoor Monitor

- Color TFT LCD screen
- IPC surveillance
- Alarm integration
- Record and snapshot
- Emergency call
- Excellent design



IP Indoor Monitor

	Indoor Monitor		
	VTH1660CH	VTH1550CH	VTH1510CH
Model			
LCD Screen	10" TFT 800×480 Capacitive	7" TFT 800×480 Capacitive	7" TFT 800×480 Resistive
Operation Button	—	Touch	Touch
RS485	1	1	1
Alarm In/Out	6/1	6/1	6/1
Memory Slot	Embedded 4GB	Micro SD, Max 32GB	Micro SD, Max 32GB
Ethernet	10M/100Mbps	10M/100Mbps	10M/100Mbps
Installation	Flush	Surface	Surface
Material	Glass/Aluminum	Plastic	Plastic
Working Temperature	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)
Power	DC12V, Max 8W	DC12V, Max 7W	DC12V, Max 7W

IP Indoor Monitor						
	Indoor Monitor					
Model	VTH1560B	VTH1560BW	VTH1520A	VTH1520AH	VTH1520AS	VTH1520AS-H
						
LCD Screen	7" TFT 800×480 Capacitive	7" TFT 800×480 Capacitive	7" TFT 800×480 Resistive	7" TFT 800×480 Resistive	7" TFT 800×480 Resistive	7" TFT 800×480 Resistive
Opreation Button	Touch	Touch	Mechanical	Mechanical	Mechanical	Mechanical
RS485	—	—	—	—	—	—
Alarm In	8	8	8	8	8	8
Memory Slot	Embedded 4GB	Embedded 4GB	Embedded 4GB	Embedded 4GB	Embedded 4GB	Embedded 4GB
Ethernet	10M/100Mbps	10M/100Mbps	10M/100Mbps	10M/100Mbps	10M/100Mbps	10M/100Mbps
Installation	Flush	Flush	Flush	Flush	Flush	Flush
Material	Glass/Plastic	Glass/Plastic	Plastic	Plastic	Plastic	Plastic
Working Temperature	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)
Power	DC12V, Max 7W	DC12V, Max 7W	DC12V, Max 7W	DC12V, Max 7W	DC12V, Max 7W	DC12V, Max 7W

IP 2-wire System

- 1.3MP CMOS camera
- Large field of view angle
- Night vision
- Voice indication
- Group call
- Remote intercom with mobile APP (VTNC3000A needed)
- Network signal and power in 2 wires
- Replace the exist analog system easily

IP 2-wire System

				Villa		Apartment	
				VTO2000A-2	VTH1550CHW-2	VTH5222CH	
Model		Model					
Image Sensor	1/3" 1.3MP CMOS	LCD Screen	7" TFT 800x480 Capacitive			LCD Screen	7" TFT 800x480 Capacitive
Lens	2.8mm	Opreation Button	Touch			Opreation Button	Touch
Angle of View	D:120° H:90°	RS485	1			RS485	1
Day/Night	Color Image	Alarm In/Out	6/1			Alarm In/Out	6/1
Keypad	Mechanical Button	Memory Slot	Micro SD, Max 32GB			Memory Slot	Micro SD, Max 32GB
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	Ethernet	10M/100Mbps			Ethernet	10M/100Mbps
Ingress Protection	IP54, IK07	Installation	Surface			Installation	Surface
Tamper Switch	1	Material	Plastic			Material	Plastic
Ethernet	10M/100Mbps	Working Temperature	-10°C~+55°C (14°F~+131°F)			Working Temperature	-10°C~+55°C (14°F~+131°F)
Installation	Surface & Flush	Power	DC24V, Max 7W			Power	DC24V, Max 7W
Material	Stainless Steel						
Working Temperature	-40°C~+60°C (-40°F~+140°F)						
Power	DC24V, Max 10W						

Wi-Fi System

- HD CMOS camera
- Large field of view angle
- Night vision
- Voice Indication
- IPC surveillance
- Wireless alarm integration
- Remote intercom with mobile APP
- Easy installation - plug & play

Wi-Fi System

	Video Doorbell		Indoor Monitor
	VTO2111D-WP		VTH5221D(W)
Model		Model	
Image Sensor	1/4" 1MP CMOS	LCD Screen	7" TFT 1024x600 Capacitive
Lens	2.2mm	Operation Buttons	Touch
Angle of View	D:125° H:105°	RS485	1
Day/Night	ICR	Alarm In/Out	6/1
Reader	Mifare Card	Memory Slot	Micro SD, Max 32GB
Keypad	Mechanical Button	Wi-Fi	IEEE802.11b/g/n
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	Ethernet	10M/100Mbps
Ingress Protection	IP65	Installation	Surface
Tamper Switch	1	Material	Plastic
Memory Slot	Micro SD, Max 32GB	Working Temperature	-10°C~+55°C (14°F~+131°F)
Wi-Fi	IEEE802.11b/g/n	Power	DC12V, PoE(802.3af), Max 8W
Ethernet	10M/100Mbps		
Installation	Surface		
Material	Plastic		
Working Temperature	-30°C~+60°C (-22°F~+140°F)		
Power	DC12V, PoE(802.3af), Max 10W		

Analog Apartment Outdoor Station

- 1.3MP CMOS camera
- Night vision
- Echo cancellation
- Voice indication
- LCD screen

Analog Apartment Outdoor Station

	Apartment Outdoor Station		
	VTO1210C-X	VTO1210B-X	VTO1210A-X
Model			
Image Sensor	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS
Lens	3.6mm	3.6mm	3.6mm
Angle of View	D:95° H:75°	D:95° H:75°	D:95° H:75°
Day/Night	Color Image	Color Image	Color Image
LCD Screen	3" STN 128x64	3" STN 128x64	3" STN 128x64
Reader	Mifare Card	Mifare Card	Mifare Card
Body Approaching	1m	1m	—
Keypad	Mechanical Button	Touchpad	Mechanical Button
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
Ingress Protection	IP54	IP65	IP54
Tamper Switch	1	1	1
Ethernet	10M/100Mbps	10M/100Mbps	10M/100Mbps
Installation	Surface & Flush	Flush	Flush
Material	Stainless Steel	Tempered Glass	Aluminum
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)
Power	DC12V, Max 10W	DC12V, Max 10W	DC12V, Max 10W

Analog Villa Outdoor Station

- 600TVL CMOS camera
- Night vision
- Echo cancellation
- Easy installation
- Plug & Play



Analog Villa Outdoor Station

	Villa Outdoor Station		
	VTO5000C	VTO5000CM	VTO5110B
Model			
Image Sensor	1/3" 600 lines	1/3" 600 lines	1/3" 600 lines
Lens	3.6mm	3.6mm	3.6mm
Day/Night	Color Image	Color Image	Color Image
Reader	—	—	Mifare Card
Keypad	Mechanical Button	Mechanical Button	Touch Button
Door Control	1 Relay Out 1 Feedback 1 Exit Button	1 Relay Out 1 Feedback 1 Exit Button	1 Relay Out 1 Feedback 1 Exit Button
Ingress Protection	IP54	IP54	IP65
Tamper Switch	1	1	1
Installation	Flush	Flush	Surface
Material	Plastic	Aluminum	Tempered Glass
Working Temperature	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	DC24V, Max 4W	DC24V, Max 4W	DC24V, Max 4W

VIDEO INTERCOM

—12—

Analog Indoor Monitor

- Color TFT LCD screen
- Alarm integration
- Emergency call
- Easy installation
- Excellent design



Analog Indoor Monitor

	Indoor Monitor			
	VTH1200DS	VTH1500B-S	VTH2020A	VTH1500AH-S
Model				
LCD Screen	4.3" TFT 480×272	7" TFT 800×480	7" TFT 800×480	7" TFT 800×480
Opreation Button	Mechanical	Touch	Mechanical	Mechanical
Alarm In/Out	4/1	6/1	6/1	6/1
Installation	Surface & Flush	Surface & Flush	Surface & Flush	Surface & Flush
Material	Plastic	Plastic	Plastic	Plastic
Working Temperature	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)	-10°C~+55°C (14°F~+131°F)
Power	DC24V, Max 4W	DC24V, Max 5W	DC24V, Max 5W	DC24V, Max 5W

KIT

- New style package,new experience
- Multiple combination,meet various requirements
- Complete accessories,easy installation and operation
- Abundant functions,distinct highlights
- Excellent cost performance



DHI-VTK-VTO2000A-VTH1550CH(S/F)



DHI-VTK-VTO2000A-VTH1560BW(S/F)



DHI-VTK-VTO2000A-2-VTH1550CHW-2(S/F)



DHI-VTK-VTO6210BW-VTH1550CH



DHI-VTK-VTO6210B(W)-VTH1560B(W)



DHI-VTK-VTO5000C-(N)-VTH1200DS

ACCESSORIES

—14—

VTO1210A-X / VTO1220A		VTO1210B-X / VTO1220BW		VTO1210C-X			VTO2000A / VTO2000A-2		
									
Model	VTOB101	Model	VTOB102	Model	VTOB103	VTOB110	Model	VTOB107	VTOB108
Mount	Flush	Mount	Flush	Mount	Flush	Surface	Mount	Flush	Surface

SOFTWARE & MANAGEMENT DEVICE

Smart PSS

Smart Professional Surveillance System

- Receive emergency call from devices
- Monitor outdoor station
- Send public message
- Unlock remotely
- Card management
- Alarm information



Devices & Users	Max. Management VTOs	100
	Max. Number of Users	50
VDP Operation	Talk	Audio talk with VTH, Video talk with VTO
	Control	Open door remotely
	Announcement	Send text message to VTH
Live Preview	Video Display Split	1/4/6/8/9/16/25/36 or customized split for Mac, up to 64 for Windows
	Max. Preview Screen	4
	Max. Views	256
	Features	Snapshot, Audio, Record, Talk, Playback
Minimum System Requirements	OS	Windows XP/Vista/7/8, Mac OSX 10.7 or above
	GPU	Intel(R) HD Graphics or above
	CPU	Intel(R) Core(TM) i3 or above
	Main Memory	2GB or above
	Display Resolution	1024×768 or above

DMSS

Digital Mobile Surveillance System

- Remote intercom with your smart phone
- Unlock remotely



Devices	Add Device Method	IP/domain, SN
	Supported Devices	Villa VTO, IPC
VDP Operation	Talk	Video talk with VTO
	Control	Open door remotely
	Alarm Push	Local Alarm
Live Preview	Features	Snapshot, Record
Minimum System Requirements	OS	gDMSS: Android 2.2 or above; iDMSS: IOS 6.0 or above
	CPU	1GHz or above
	RAM	1GHz or above
	Display Resolution	480×800 or above


VTS1500A

Management Device

- Receive call from devices
- Monitor outdoor station
- Unlock remotely



Max. Management VTOs	50
LCD Screen	7" TFT 800×480 Resistive
Operation Buttons	Mechanical
Audio In/Out	1/1
Ethernet	10M/100Mbps
Material	Aluminum
Working Temperature	-10°C~+55°C
Power	DC12V, Max 7W

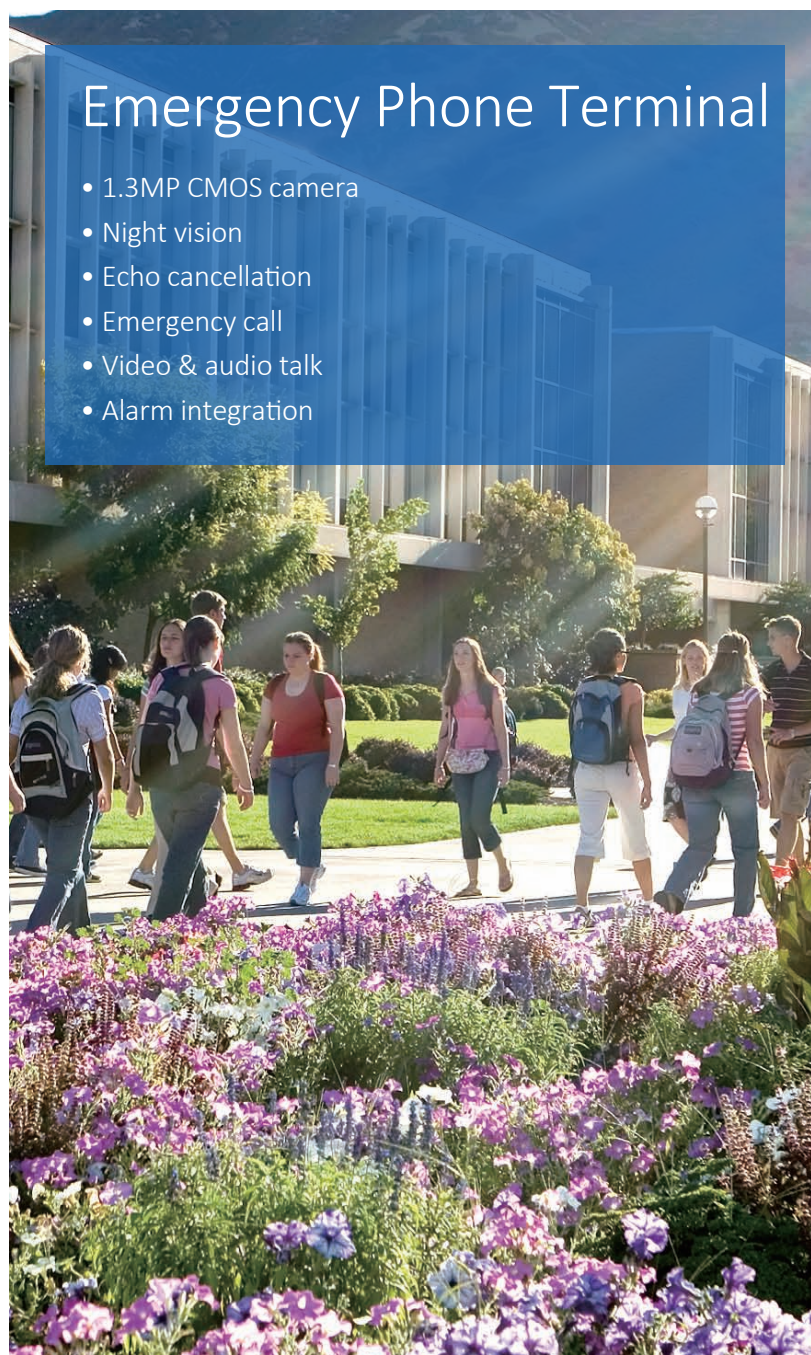

Emergency Phone Terminal

- 1.3MP CMOS camera
- Night vision
- Echo cancellation
- Emergency call
- Video & audio talk
- Alarm integration


Emergency Phone Terminal

	Emergency Phone Tower			Emergency Phone Box	
	VTA8111A	VTA8111AG	VTA8111AB	VTT201	VTT2610C-C
Model					
Image Sensor	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS	1/3" 1.3MP CMOS
Lens	Pinhole	Pinhole	Pinhole	Pinhole	Pinhole
Day/Night	Color Image	Color Image	Color Image	Color Image	Color Image
Reader	Mifare Card	Mifare Card	Mifare Card	-	Mifare Card
Keypad	Mechanical Button	Mechanical Button	Mechanical Button	Mechanical Button	Mechanical Button
Door Control	2	2	2	-	2
Extension	3G/4G,Wi-Fi,LED Screen,IP PTZ,IP Dome,Alarm Lamp,Siren	3G/4G,Wi-Fi,LED Screen,IP PTZ,IP Dome,Alarm Lamp,Siren	3G/4G,Wi-Fi,LED Screen,IP PTZ,IP Dome,Alarm Lamp,Siren	-	3G/4G
Alarm In/Out	2/2	2/2	2/2	2/2	2/2
Ingress Protection	IP65, IK10	IP65, IK10	IP65, IK10	IP54, IK08	IP65, IK10
Tamper Switch	2	2	2	1	1
Memory Slot	Micro SD, Max 64G	Micro SD, Max 64G	Micro SD, Max 64G	—	Micro SD, Max 64G
Ethernet	100M/1000Mbps	100M/1000Mbps	100M/1000Mbps	10M/100Mbps	10M/100Mbps
Installation	Pole	Pole	Pole	Surface	Surface
Material	SPCC	SPCC	SPCC	Aluminum	Aluminum
Working Temperature	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)	-30°C~+60°C (-22°F~+140°F)
Power	AC 176V-264V@ 47Hz-63Hz,Max 80W	AC 176V-264V@ 47Hz-63Hz,Max 80W	AC 176V-264V@ 47Hz-63Hz,Max 80W	DC12~24V, POE(802.3af),Max 8W	DC12~24V, POE(802.3af),Max 10W





SOLUTIONS



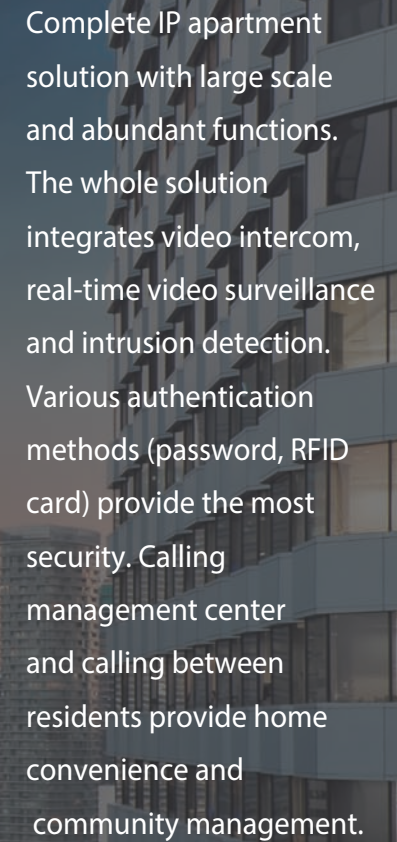

Recommend




Unit Outdoor Station
1.3MP COMS
IP54, IK07



IP Indoor Monitor
7" Capacitive

> IP Small Apartment Solution

Flexible modular design with camera, button, keyboard, reader and fingerprint modules. Choose anyone preferred by users and install in front panel (2-module, 3-module and 9-module). One button to call resident directly enables convenient communication in small apartment application.

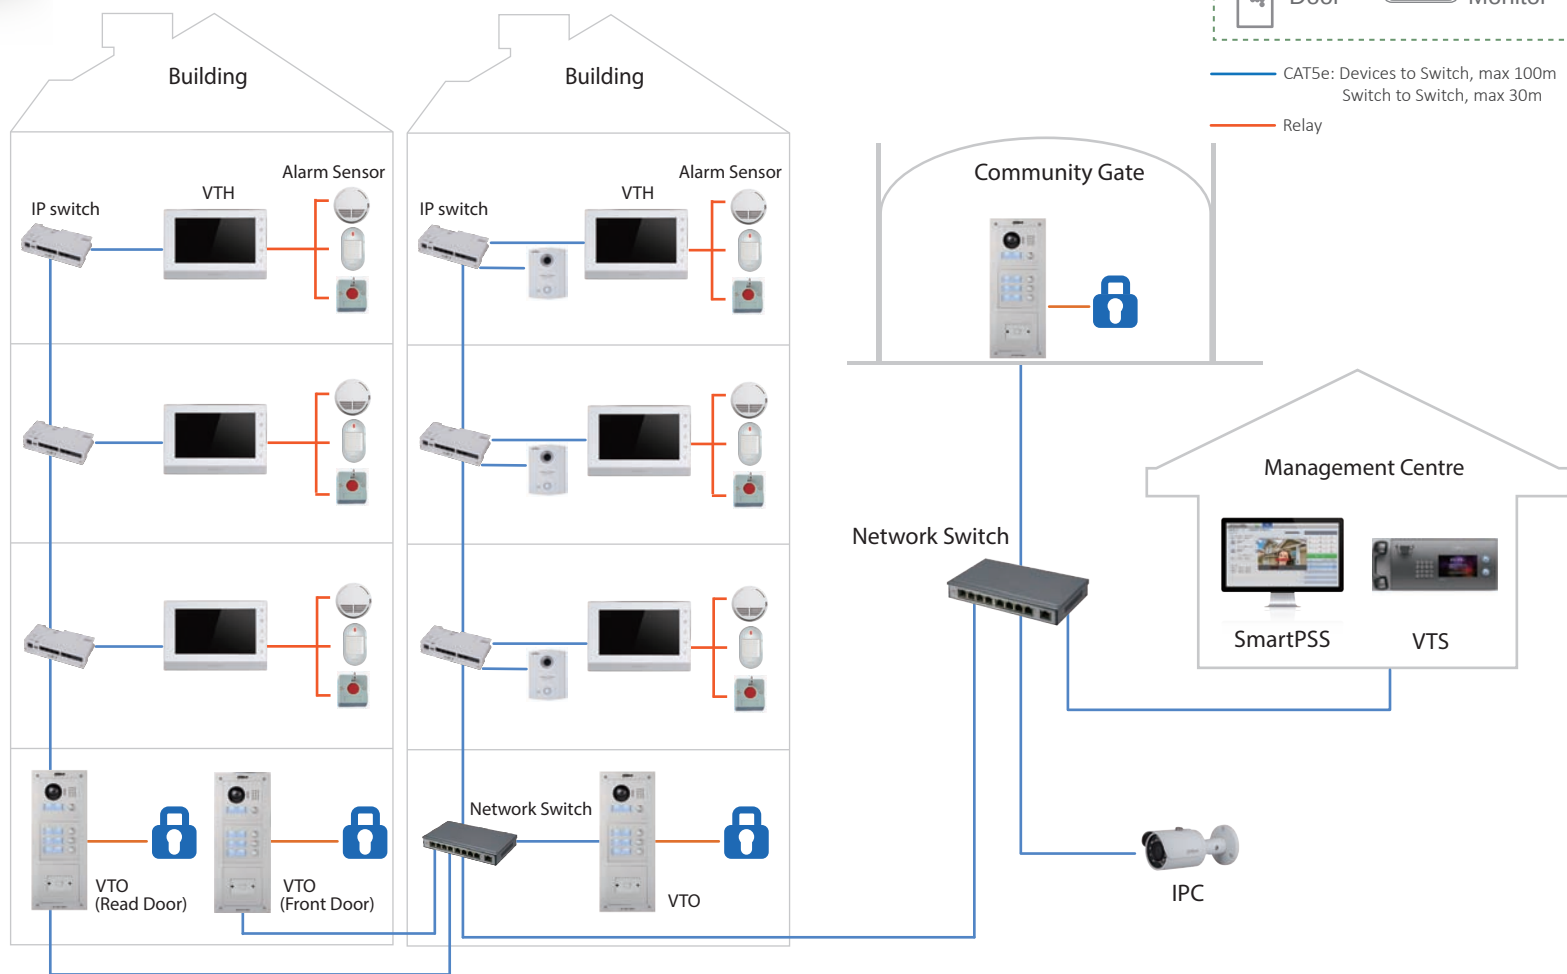


Features

- Video & Audio Call
- Night Vision
- Group Call
- Emergency Call
- Modular Design
- Unlock Remotely
- Alarm Integration
- Video & Audio Messaging
- IPC Surveillance

Recommend

- VTO2000A-C Camera Module 1.3MP COMS IP54, IK07
- VTO2000A-R Card Module 13.56MHz
- VTO2000A-B Button Module IP54, IK07
- VTO2000A-K Keypad Module Password
- VTH1550CH IP Indoor Monitor 7" Capacitive

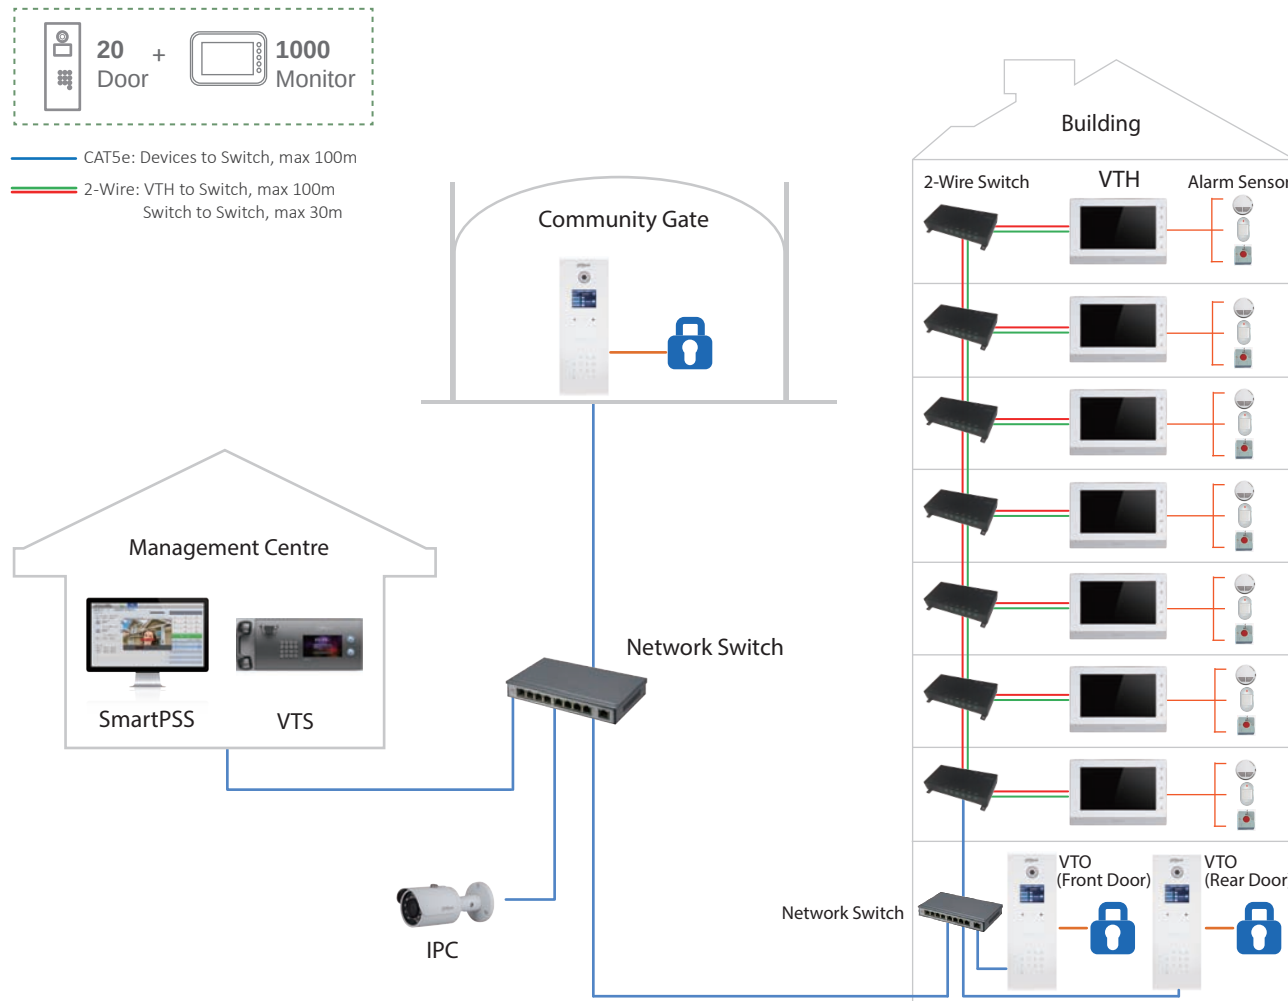

Use two wires to transmit both signal and power. 2-wire indoor monitors can access to Internet easily by special converter. The system adapts to multiple wiring environments easily and reserves all digital apartment functions. The system is designed to replace existing analog apartment system and make a full IP world.

Features



Video & Audio Call



Night Vision



Group Call



Emergency Call



Unlock Remotely



Alarm Integration



Video & Audio Messaging



IPC Surveillance

Recommend



VTO1220BW

Unit Outdoor Station
1.3MP COMS
IP65




VTH5222CH

2-Wire Indoor Monitor
7" Capacitive

> Analog Apartment Solution

Analog apartment system provides simple installation. High video quality and nearly zero time delay exceed traditional analog experience. Cost-effective implementation gives users semi-digital solution.

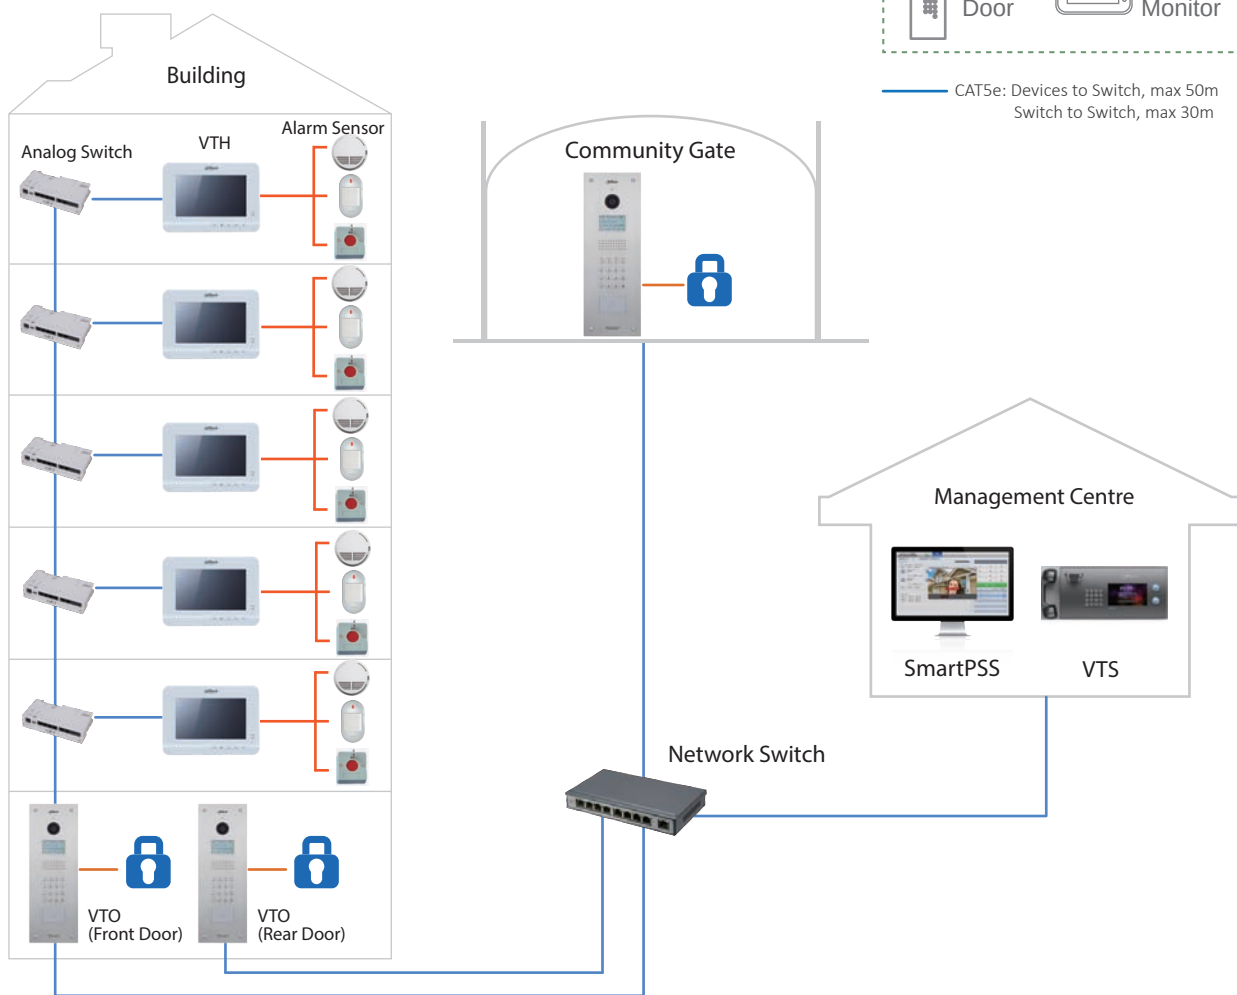

Features



Video & Audio Call



Unlock Remotely



Night Vision



Alarm Integration



Emergency Call

Recommend



VTO1210C-X

Unit Outdoor Station
1.3MP COMS
IP54, IK07




VTH2020A

Analog Indoor Monitor
7" TFT LCD



— CAT5e: Devices to Switch, max 100m

— Relay

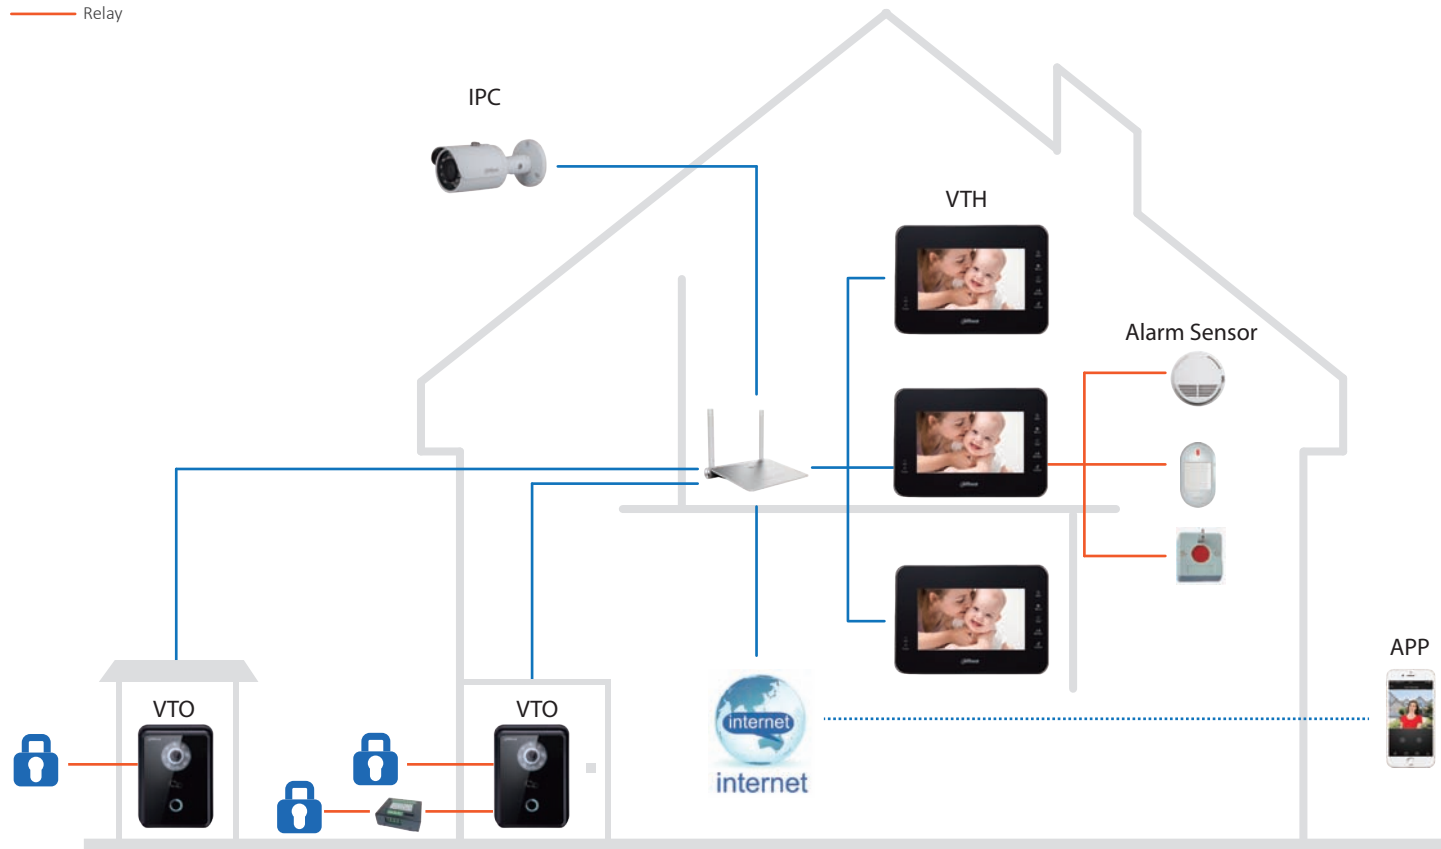

Complete IP villa solution with abundant functions. Remote intercom, door control, real-time video surveillance and message push through mobile phone. No matter where you are, no visitor or message will be missed.

Features

Recommend



Video & Audio Call



Night Vision



Group Call



Emergency Call



Unlock Remotely



Alarm Integration



Video & Audio Messaging



IPC Surveillance



VTO6210B

Villa Outdoor Station
1MP CMOS
IP65




VTH1560B

IP Indoor Monitor
7" Capacitive

> IP 2-Wire Villa Solution

Use two wires to transmit both signal and power. 2-wire indoor monitors can access to Internet easily by special converter. The system adapts to multiple wiring environments easily and reserves all digital villa functions. Replace existing analog villa system and make a full IP world.

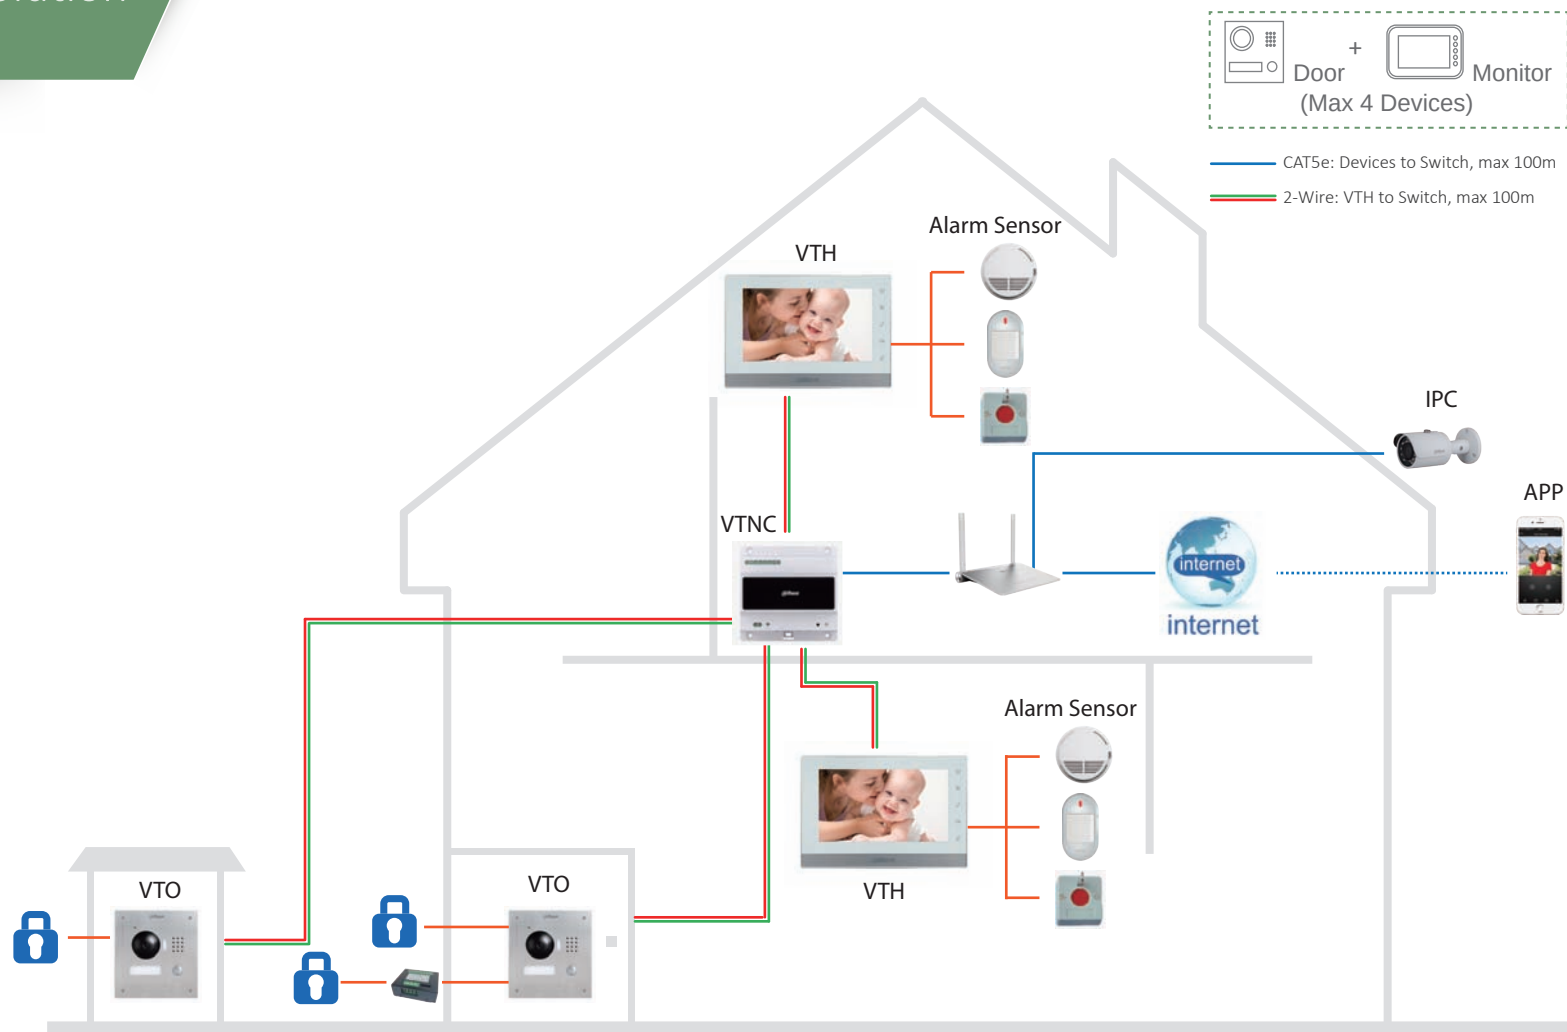

Features



Video & Audio Call



Night Vision



Group Call



Smartphone APP



Unlock Remotely



Alarm Integration



Video & Audio Messaging



IPC Surveillance

Recommend



VTO2000A-2

Villa Outdoor Station
1.3MP CMOS
IP54, IK07



VTH1550CHW-2

Indoor Monitor
7" Capacitive




— CAT5e: Devices to Switch, max 100m

— Relay

Wi-Fi

Airfly

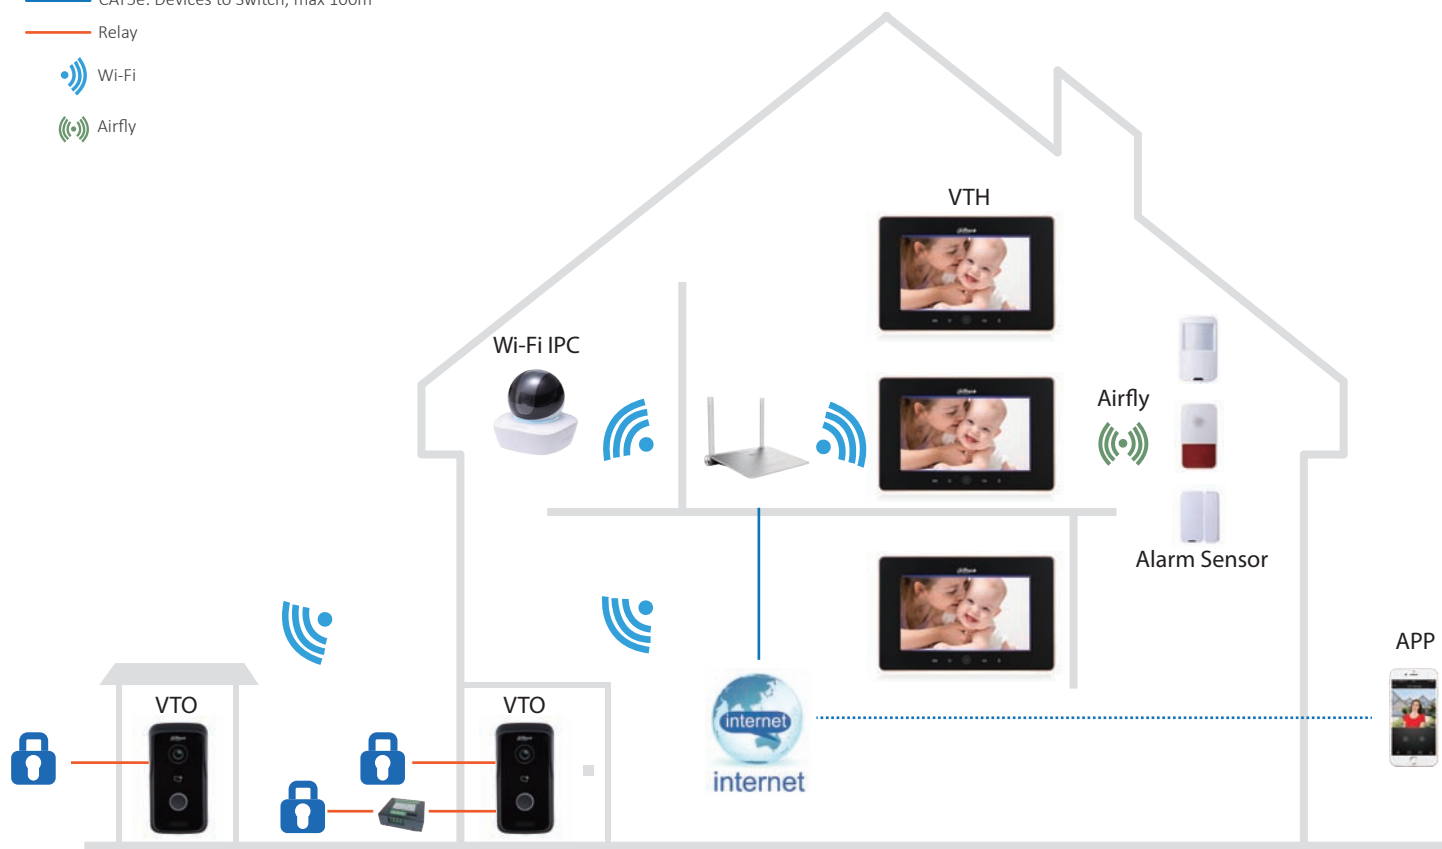

Wi-Fi villa system integrates video intercom, remote control, real-time video surveillance and intrusion detect. Outdoor station, Indoor monitor, alarm detector and smart lock work together through Wi-Fi and Dahua Airfly. All wireless components create a smart home. Wi-Fi outdoor station can work as a doorbell with mobile phone independently.

Features



Video & Audio Call



Night Vision



Group Call



Emergency Call



Wi-Fi



Unlock Remotely



Alarm Integration



Video & Audio Messaging



IPC Surveillance



Standard PoE

Recommend



VTO2111D-WP

Wi-Fi Villa Outdoor Station
1MP CMOS
IP65, H: 105°




VTH5221D

Wi-Fi Indoor Monitor
7" Capacitive, 1024x600

> Analog Villa Solution

Analog villa system provides simple installation. High video quality and nearly zero time delay exceed traditional analog experience. The only thing you need to do is "plug and play".

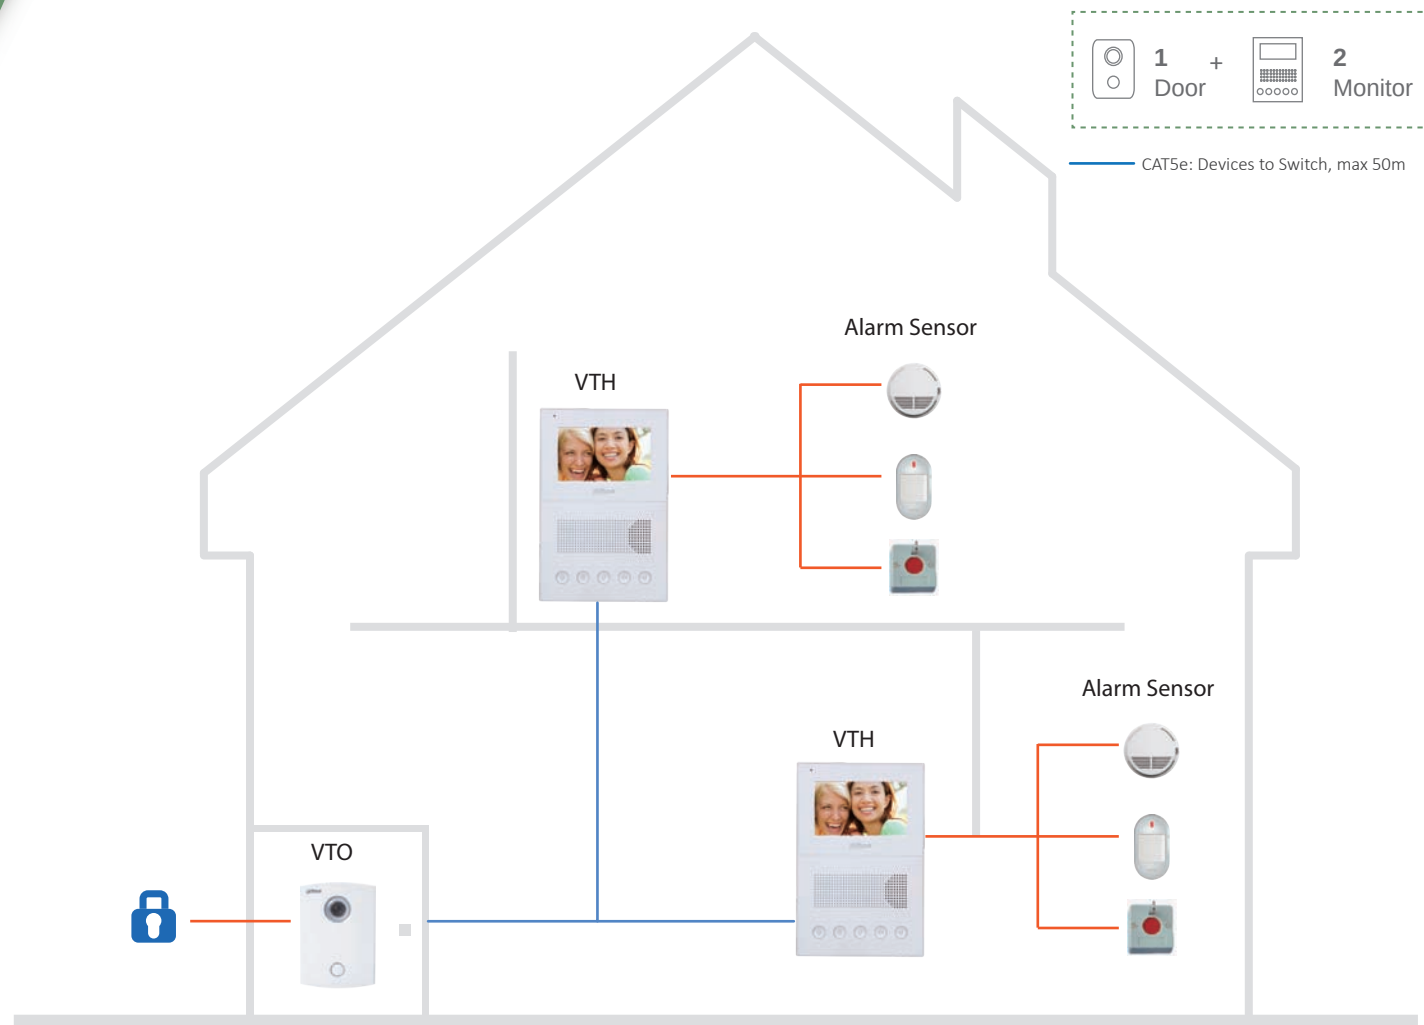

Features



Video & Audio Call



Night Vision



Group Call



Unlock Remotely



Alarm Integration

Recommend



VTO5000C

Villa Outdoor Station
600 lines, IP54



VTH1200DS

Indoor Monitor
4.3" TFT LCD

Emergency Phone Terminal Solutions <



HD Video



Bidirectional Video
& Audio Talk



CCTV
Surveillance



Remote Monitor



Remote
Broadcast



Alarm Lamp



Patrol



Vandal Proof

Optical Fibre
CAT5e



Basic



- Call Management Centre
- Video & Audio Talk

- Call Management Centre
- Video & Audio talk



Emergency Phone Box
VTT201



Court



Hospital



Residential Building



Construction



Office Building



Jail

- Management Centre DSS

- Speed Measurement
- Vehicle license Plate Recognition



Transportation



- Traffic Information Display

- Recognition Result Delivery



- Call Management Centre
- Video & Audio talk



Emergency Phone Box
VTT2610C-C
10" HD Screen



Transportation



Campus



Hospital



Square



Scenic Spot



Parking Area



Railway Station
& Airport



Community



Bank



CCTV Integration

- Emergency Announcing
- Broadcast

Emergency phone terminals can be widely applied in all public areas. Multiple product types meet different installation requirements. Abundant extension devices make a complete solution possible.



Quality by design

Distributed by

* Design and specifications are subject to change without notice.

Video Intercom - 01, Jan 2017



DAHUA TECHNOLOGY CO., LTD.

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com



© Dahua Technology, All rights reserved